

DELICE

Ice Cream Freezer Cabinets



The DELICE cabinets in the gelato version can accommodate trays measuring 60x80 cm; they are equipped with no. 5 shelves for positioning the gelato bowls. Made entirely in stainless steel, by respecting the highest possible quality standards, they feature 70mm thick insulation produced by injecting HCFC-free polyurethane resins, with utmost respect for the environment. They have a radial bottom to enable optimum hygiene and easy cleaning, and a slot-in easy replaceable magnetic seal. The temperature is controlled by an easy-to-read and programming electronic panel that enables the maximum precision of any working cycle.



Back panel control board



Energy save



Tropicalized system



Thermostatic valve system (ARG/40-41)






Radial bottom



Gelato hardening cycle

TECHNICAL DATA:



External dimensions (WxDxH)
Capacity
Standard fitting (Racks)
Max absorbed power **
Refrigerated power ***
Temperature
Gas
Input voltage
Climatic class


cm
lt
nr
W
W
°C

	ARG/30	ARG/40	ARG/41
External dimensions (WxDxH)	78x90x211	78x108x211	78x108x211
Capacity	750	900	900
Standard fitting (Racks)	5 56x74	5 60x80	5 60x80
Max absorbed power **	1170	1470	1500
Refrigerated power ***	935	1070	1070
Temperature	-22/-10	-25/-10	-25/-10
Gas	R452A	R452A	R452A
Input voltage	Volt 1x230/50Hz	Volt 1x230/50Hz	Volt 1x230/50Hz
Climatic class	5	5	5


Evap. -10°C cond. +45°C / *ASHRAE (Evap. -23,3°C cond. +54,4°C)

INSTALLATION DIAGRAM:

ARG/30


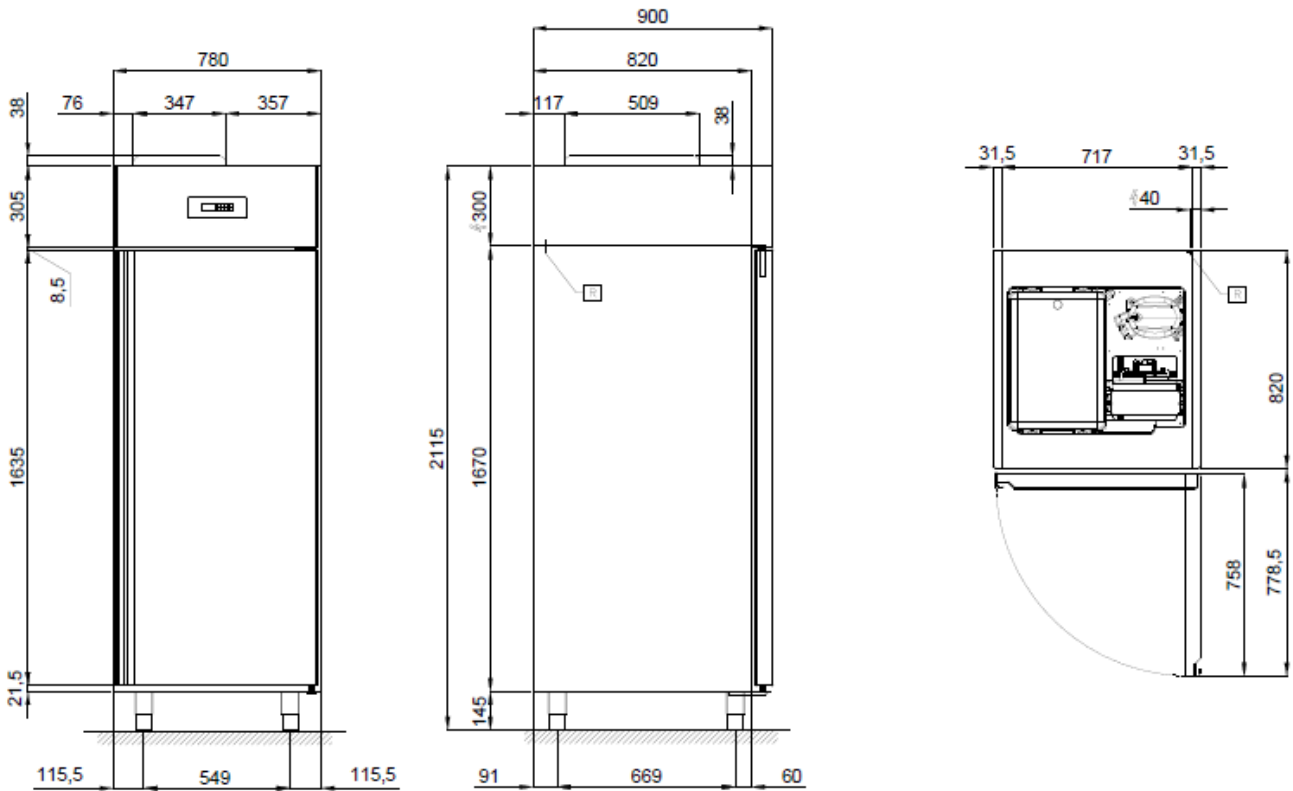


ARG/40 – ARG/41

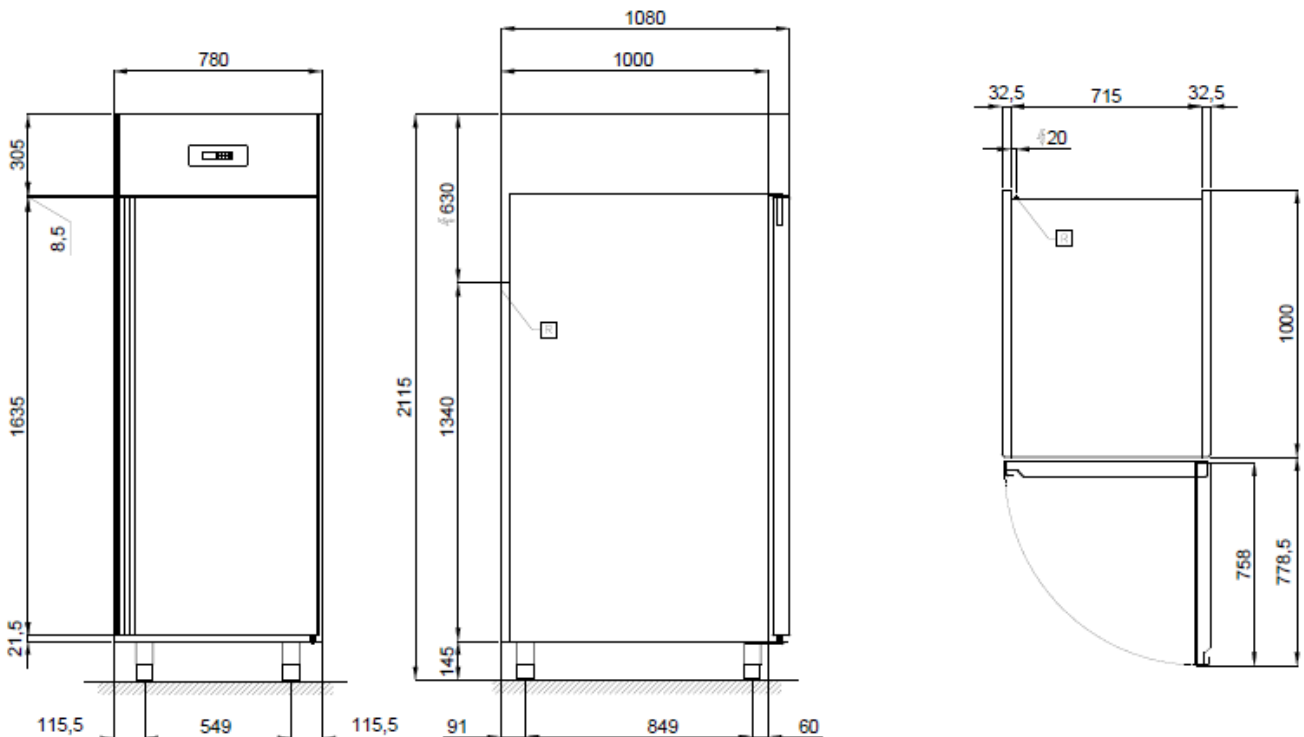

ELECTRICITY SUPPLY: 230 V 1 - 50Hz (* SHUKO plug) – Wire length mt 1,5

ICE CREAM CONTAINERS CAPACITY:

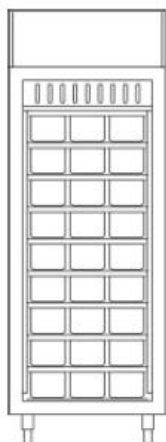


No. 54 containers of 5 lt. (cm 36x16x12h)

ACCESSORIES AND OVERPRICES ON REQUEST:



45020506 Pair of runners for ARG/30



45020511 Pair of runners for cm 60x80 tray

45020540 cm 56x74 shelf for ARG/30

45020512 Rilsan cm 60x80 shelf


45020515 S/s cm 60x80 shelf



45000540 Set of Ø 100 castors



40200560 Wi-Fi supervising system



40200560 60Hz frequency

Prearranged version with valve system (deduction)